


"TRANSPORT"  
CINCH DB-25P

"ACCESSORY 1"  
CINCH DC-37P

SCHEMATIC

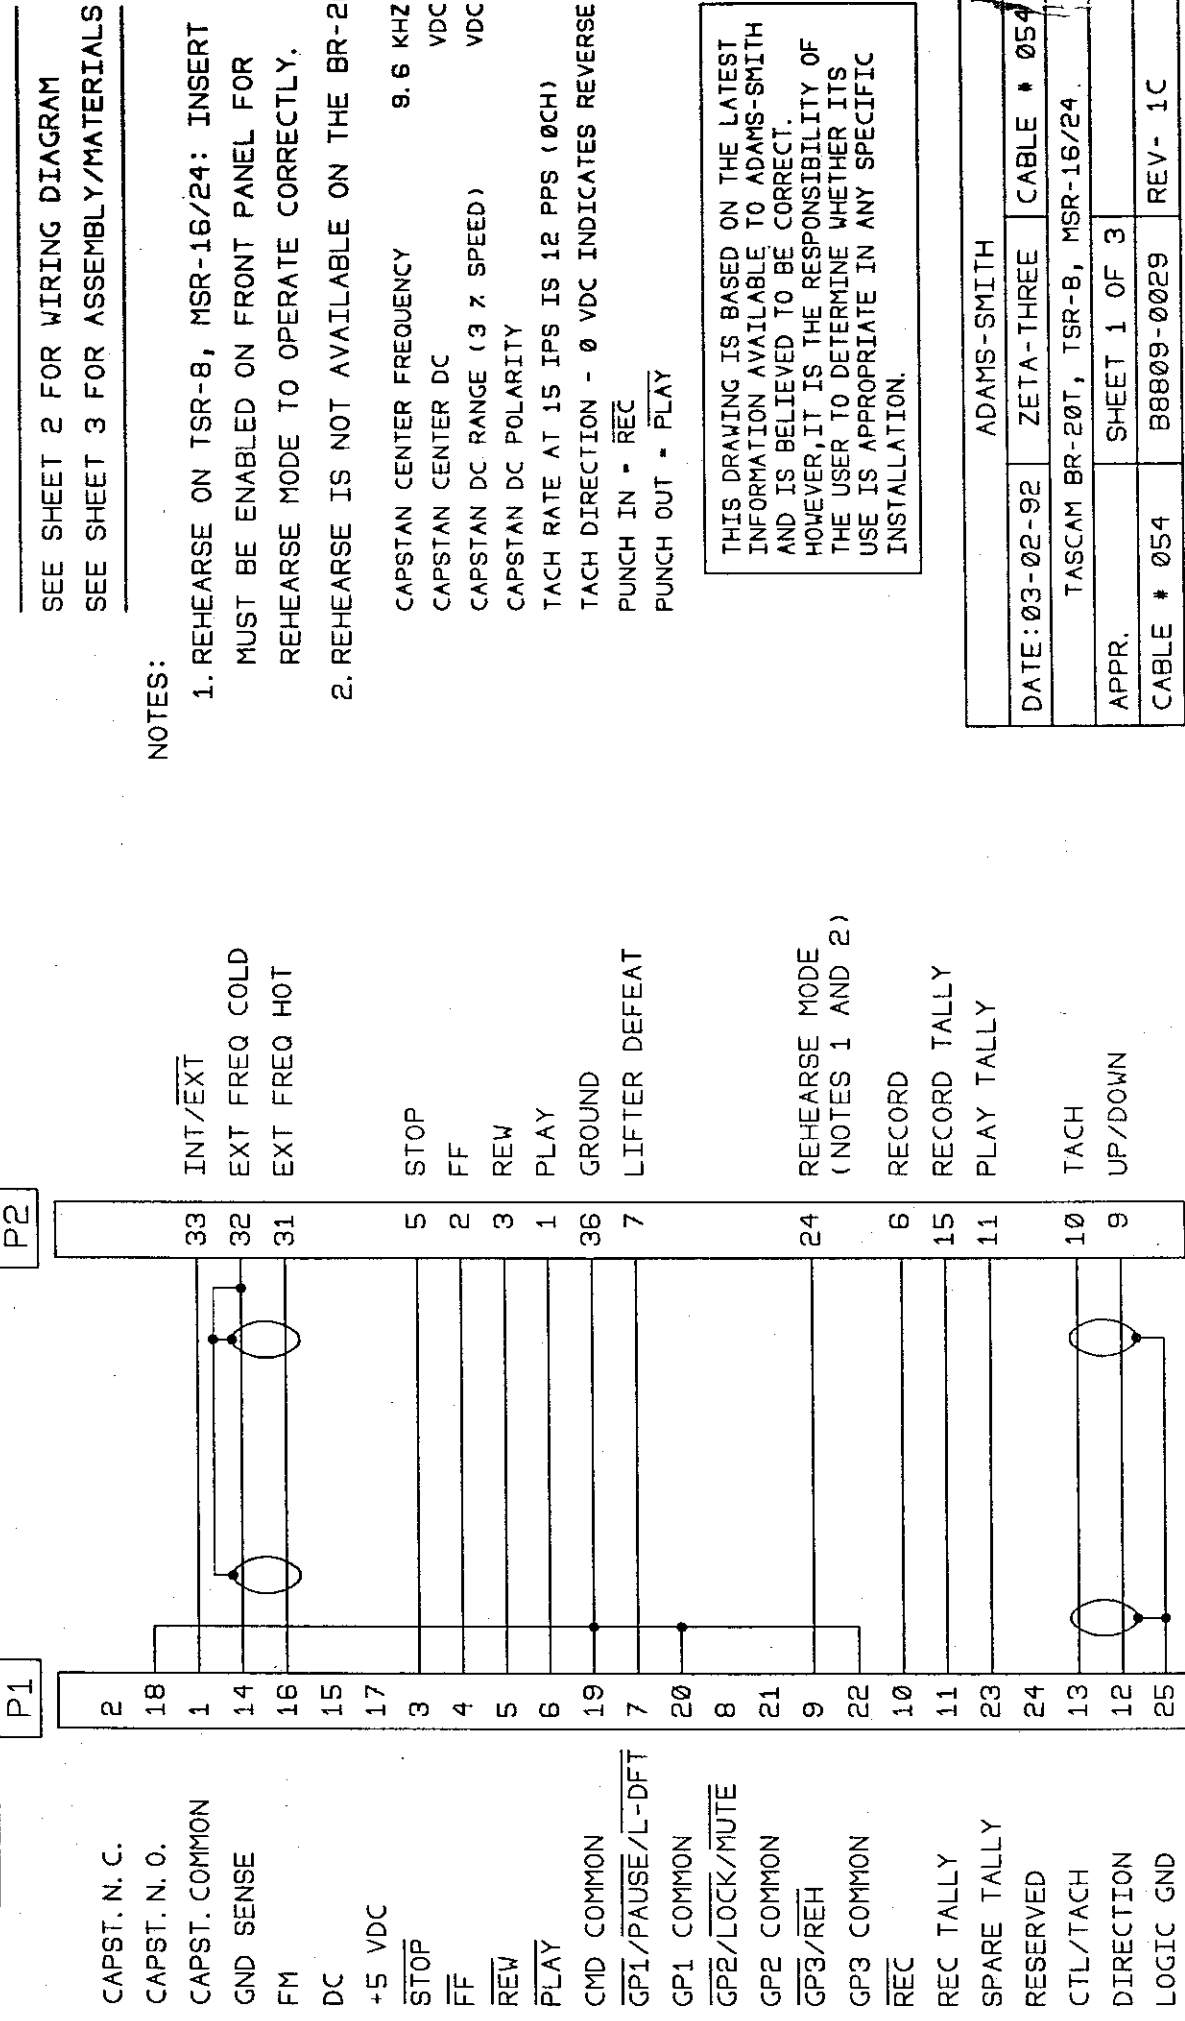

NOTES:


1. REHEARSE ON TSR-8, MSR-16/24: INSERT MUST BE ENABLED ON FRONT PANEL FOR REHEARSE MODE TO OPERATE CORRECTLY.
2. REHEARSE IS NOT AVAILABLE ON THE BR-20

CAPSTAN CENTER FREQUENCY 9.6 KHZ  
 CAPSTAN CENTER DC VDC  
 CAPSTAN DC RANGE (3 % SPEED) VDC  
 CAPSTAN DC POLARITY  
 TACH RATE AT 15 IPS IS 12 PPS (ØCH)  
 TACH DIRECTION - Ø VDC INDICATES REVERSE  
 PUNCH IN - REC  
 PUNCH OUT - PLAY

THIS DRAWING IS BASED ON THE LATEST INFORMATION AVAILABLE TO ADAMS-SMITH AND IS BELIEVED TO BE CORRECT. HOWEVER, IT IS THE RESPONSIBILITY OF THE USER TO DETERMINE WHETHER ITS USE IS APPROPRIATE IN ANY SPECIFIC INSTALLATION.

|                                 |              |             |
|---------------------------------|--------------|-------------|
| ADAMS-SMITH                     |              |             |
| DATE: 03-02-92                  | ZETA-THREE   | CABLE # 054 |
| TASCAM BR-20T, TSR-8, MSR-16/24 |              |             |
| APPR.                           | SHEET 1 OF 3 |             |
| CABLE # 054                     | B8809-0029   | REV- 1C     |


# WIRING DIAGRAM

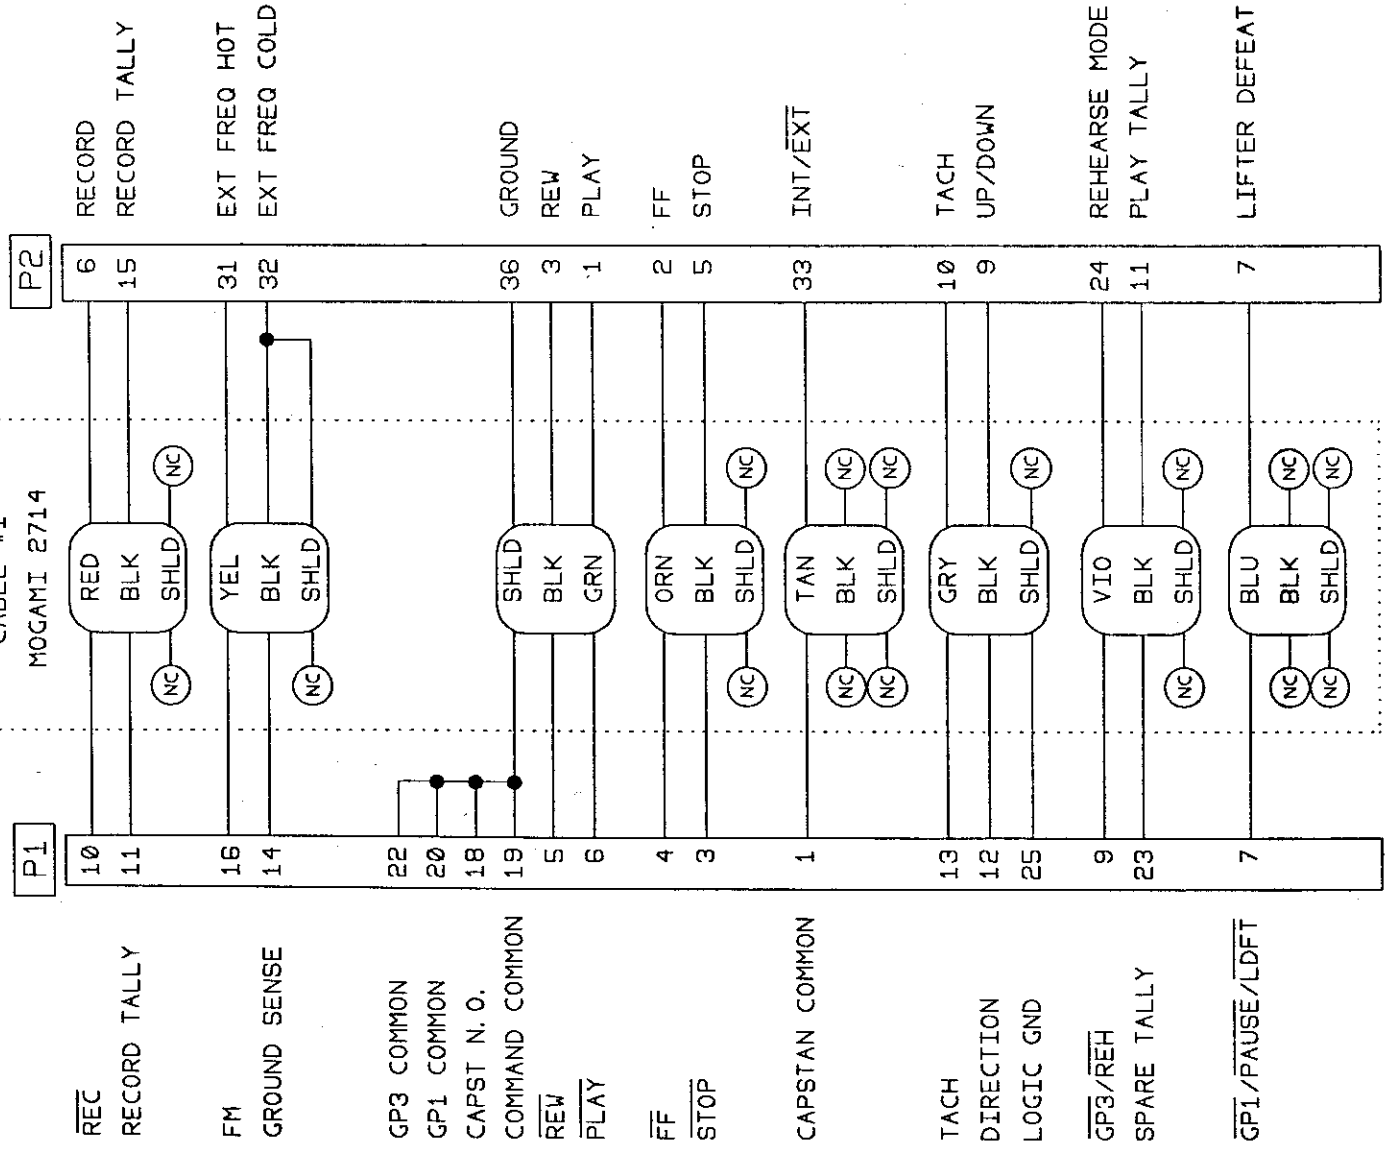

## NOTES

- (NC) NO CONNECTION (NOTE THAT CONNECTIONS MAY BE MADE ON ONE END OF THE WIRE AND NOT THE OTHER)
- DENOTES WIRE PAIRS

|                                 |              |             |
|---------------------------------|--------------|-------------|
| ADAMS-SMITH                     |              |             |
| DATE: 03-02-92                  | ZETA-THREE   | CABLE # 054 |
| TASCAM BR-201, TSR-8, MSR-16/24 |              |             |
| APPR.                           | SHEET 2 OF 3 |             |
| CABLE # 054                     | 88809-0029   | REV- 1C     |

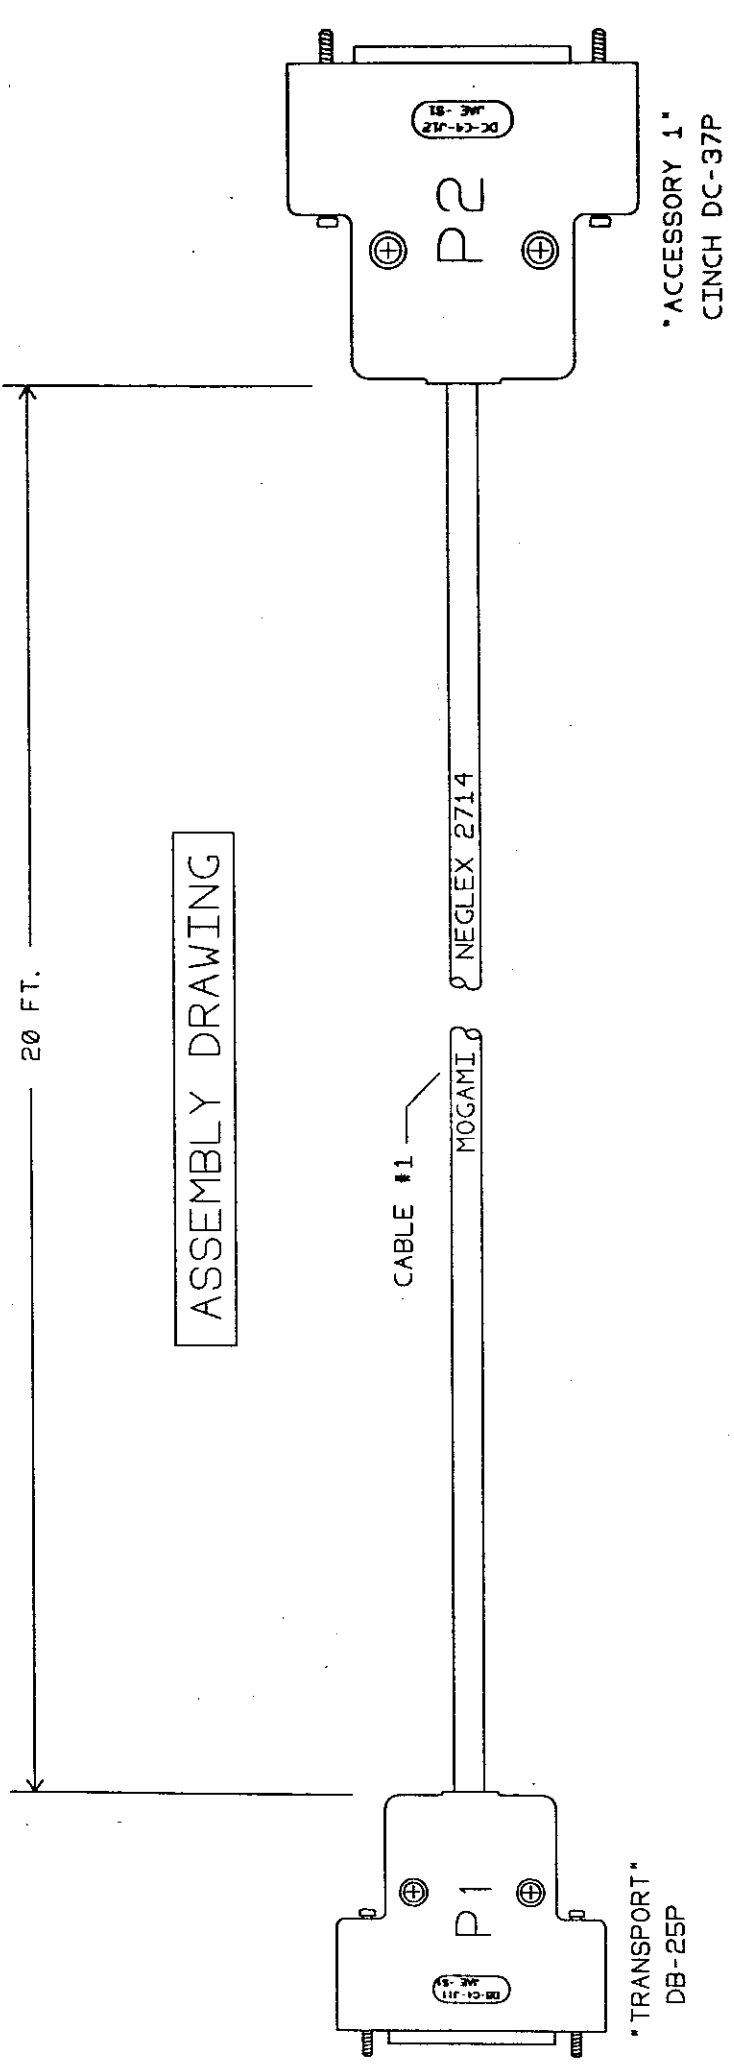

| DESCRIPTION                      | MFG.   | MFG. #       | A-S#      | LOCATION | QTY    |
|----------------------------------|--------|--------------|-----------|----------|--------|
| 25 PIN PLUG                      | JAE    | DB-25P       | 2102-0043 | P1       | 1      |
| SHELL W/LOCKING SCREWS           | JAE    | DB-C4-J11-S1 | 2102-0024 | P1       | 1      |
| 37 PIN PLUG                      | JAE    | DC-37P       | 2102-0079 | P2       | 1      |
| SHELL W/LOCKING SCREWS           | JAE    | DC-C4-J12-S1 | 2102-0080 | P2       | 1      |
| CABLE (8 SHIELDED PR)            | MOGAMI | NEGLEX 2714  | 6006-0001 | CABLE #1 | 20 FT. |
| SLEEVING/HEAT SHRINK AS REQUIRED |        |              |           |          |        |

| ADAMS-SMITH                     |              |             |  |
|---------------------------------|--------------|-------------|--|
| DATE: 03-02-92                  | ZETA-THREE   | CABLE # 054 |  |
| TASCAM BR-20T, TSR-8, MSR-16/24 |              |             |  |
| APPR.                           | SHEET 3 OF 3 |             |  |
| CABLE # 054                     | B8809-0029   | REV- 1C     |  |