


"TRANSPORT"
CINCH DB-25P

"REMOTE CONTROL"
CINCH-JONES
DB25P

(AT REAR OF
AUTOLDCATOR)

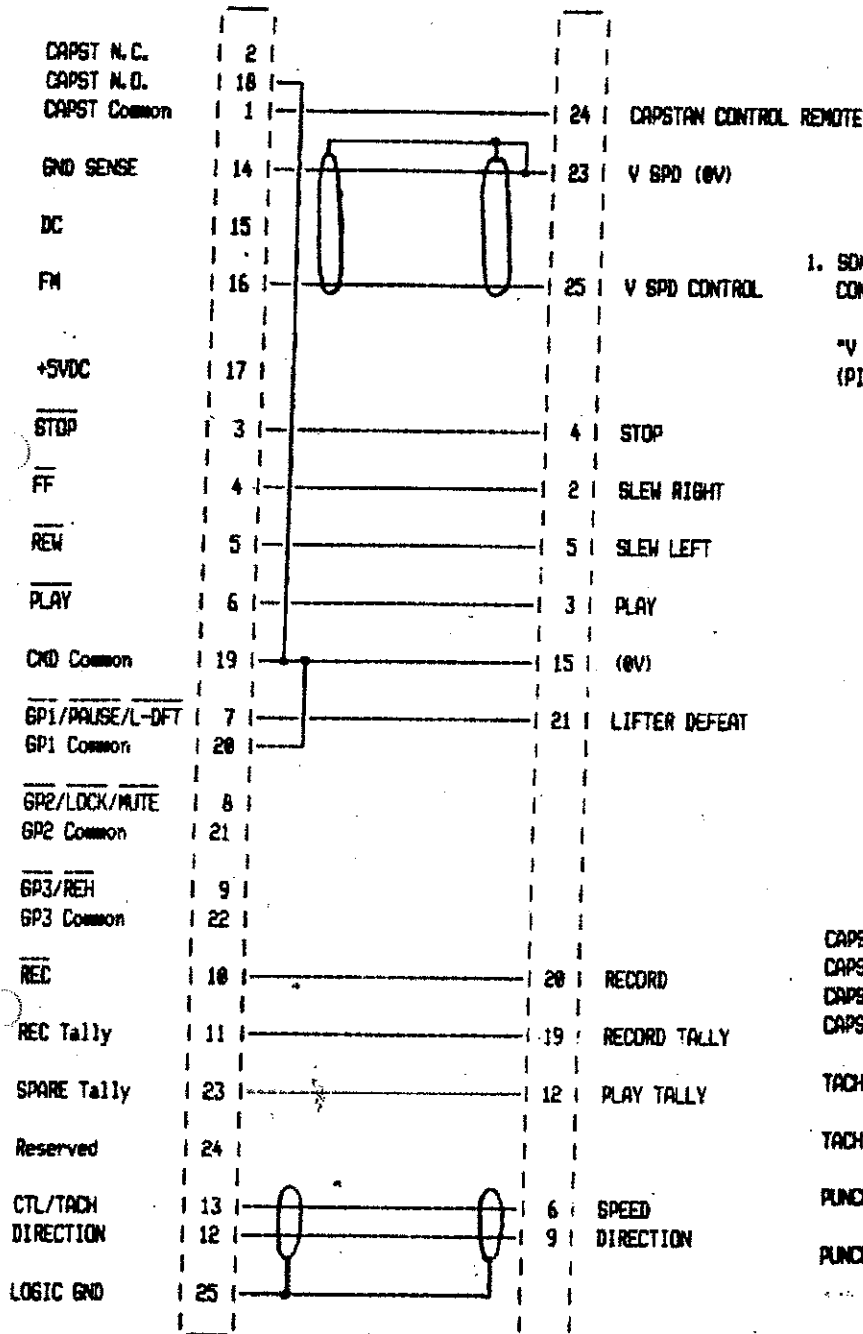

-NOTES-

1. SOME EARLY MODELS WERE EQUIPPED WITH DC CONTROLLED CAPSTANS. IN THIS CASE,

"V SPD CONTROL" SHOULD BE CONNECTED TO "DC" (PIN 15) INSTEAD OF "FM" (PIN 16).

CAPSTAN CENTER FREQUENCY 9.6 KHz
 CAPSTAN CENTER DC VDC
 CAPSTAN DC RANGE (3% SPEED) VDC
 CAPSTAN DC POLARITY

TACH RATE AT 15 IPS IS 60 PPS (3CH)
 AT 30 IPS IS 120 PPS (78H)
 TACH DIRECTION 0 VDC INDICATES REVERSE

PUNCH IN = REC + PLAY


PUNCH OUT = STOP

THIS DRAWING IS BASED ON THE LATEST INFORMATION AVAILABLE TO ADAMS-SMITH AND IS BELIEVED TO BE CORRECT. HOWEVER, IT IS THE RESPONSIBILITY OF THE USER TO DETERMINE WHETHER ITS USE IS APPROPRIATE IN ANY SPECIFIC INSTALLATION.

ADAMS-SMITH		
Drawn	ZETA-THREE	Date
SOUNDCRAFT 760 MKII/762 MKIII		
INTERFACE DRAWING		
030	Rev	-1

ZETA "TRANSPORT" CONNECTOR CINCH DB25-P			"REMOTE" CINCH-JONES DB25P					
Name	Pin	Comments	Pin	Name	Pin	Name	Pin	Name
YEL Blk Shld	FM GROUND SENSE -	16 14 -	25 23 23	V SPD CONTROL V SPD (0V) V SPD (0V)				
ORG Blk Shld	FF/ STOP/ -	4 3 -	2 4 -	SLEW RIGHT STOP				
GRN Blk Shld	PLAY/ REW/ CMD Common	6 5 19	3 5 15	PLAY SLEW LEFT (0V)				
BLU Blk Shld	SP1/PAUSE/LDFT/ -	7 - -	21 - -	LIFTER DEFEAT				
TAN Blk Shld	CAPST Common -	1 - -	24 - -	CAPST CTRL REM				
PURPL Blk Shld	SPARE Tally -	23 - -	12 - -	PLAY TALLY				
RED Blk Shld	REC/ RECORD Tally -	18 11 -	20 19 -	RECORD REC TALLY				
GREY Blk Shld	TACH DIRECTION LOGIC GND	13 12 25	6 9 -	SPEED DIRECTION				
	CAPST Common GND SENSE SP1 Common	18 19 20						Jumper

ADAMS-SMITH		
Drawn	ZETA-THREE	Date
SOUND CRAFT 760 MKII/762 MKIII		
WIRING DIAGRAM		
App'd	030	Rev
		-1

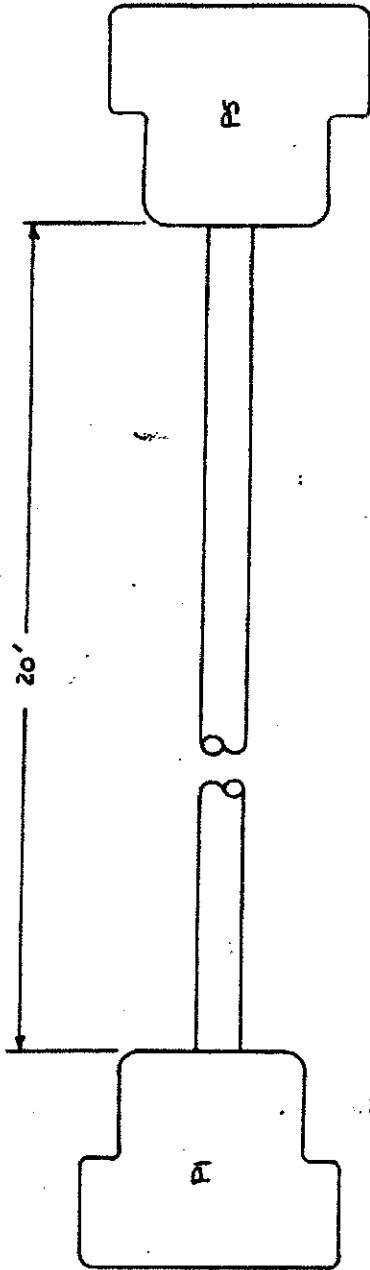

ITEM	DESCRIPTION	QTY	MFRG	PART NO
BILL OF MATERIAL				
ADAMS SMITH				
PI/PS	SHIELDED CABLE PAIR WITH SNEEL LOCKING	20'	MCGAMI	NEGLEX 27H
PI/PS	RECEPTACLE	2	JAE	DB-C4-J11-S1
		2	JAE	DB-25P
ADAMS SMITH				
DWN	WARD INTERFACE	ZETA ~ THREE		DATE 12-1-66
CABLE 030 SOUNDCRAFT 760 MKII, 762 MKIII				
REV		B8612-0453		REV -1