


"TRANSPORT"
CINCH DB-25P

"SYNCHRONIZER"
CINCH DB-25P

-NOTES-

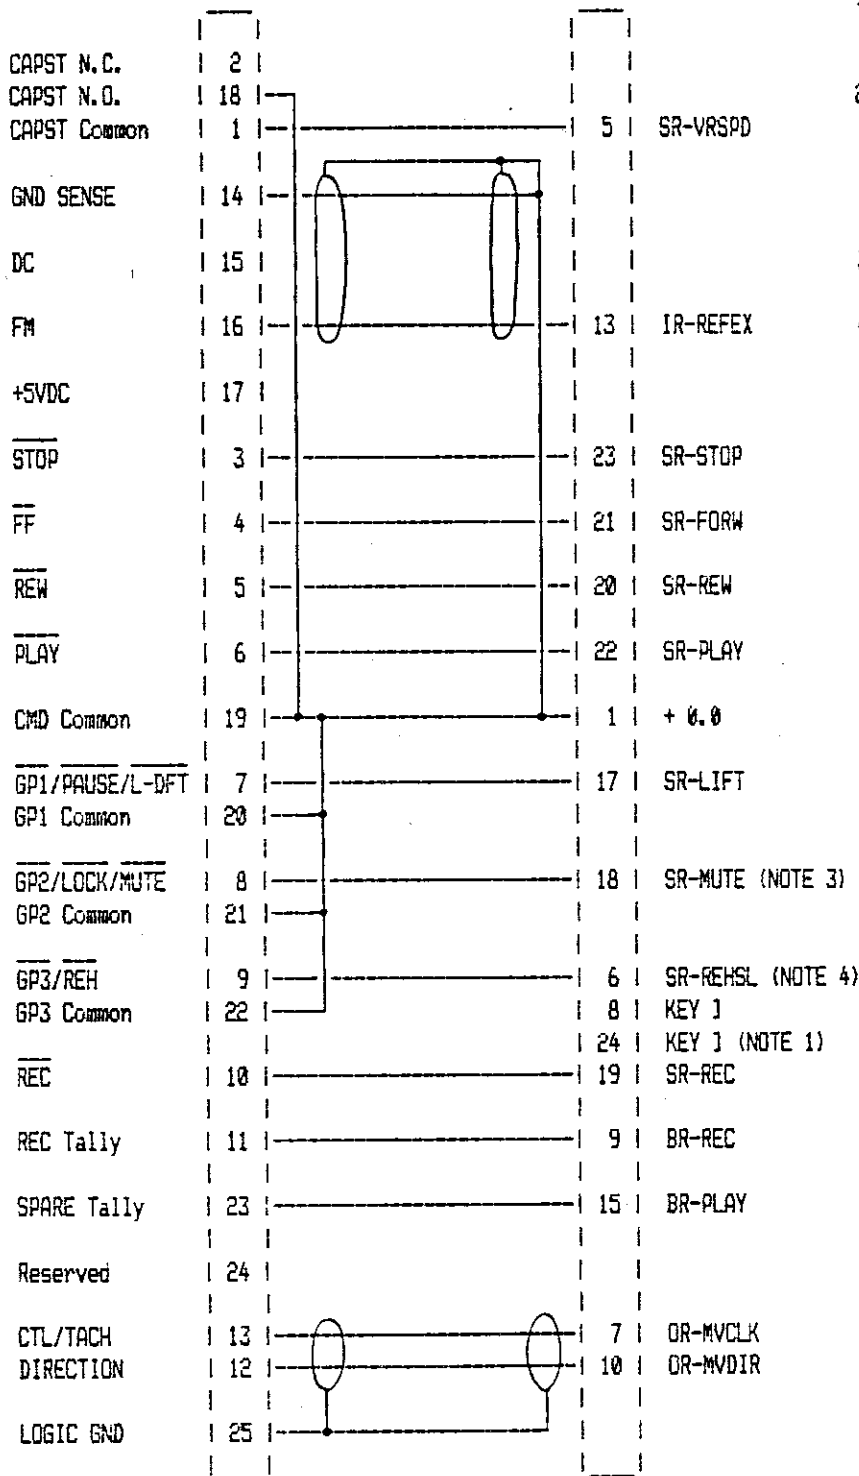

1. REMOVE (CLIP OFF) PINS 8 AND 24. A807/812/820 REQUIRE PINS 8 AND 24 BE REMOVED.
2. CONNECTION TO TRANSPORT:
FOR A807/812/820 (TIME CODE VERSIONS ONLY), USE "SYNCHRONIZER" CONNECTOR.
FOR C270/274/278 USE "PARALLEL REMOTE" CONNECTOR.
3. MUTE FUNCTION IS AVAILABLE ONLY ON A-807/812/820.
4. REHEARSE FUNCTION IS AVAILABLE ONLY ON A-812/820.

CAPSTAN CENTER FREQUENCY 9.6 KHz
CAPSTAN CENTER DC VDC
CAPSTAN DC RANGE (3% SPEED)
CAPSTAN DC POLARITY


FOR C270/274/278:
TACH RATE AT 15 IPS IS 32 PPS (20H)
FOR A807 AND A812:
TACH RATE AT 15 IPS IS 128 PPS (80H)
FOR A820:
TACH RATE AT 15 IPS IS 512 PPS (200H) FOR A820
TACH DIRECTION 0 VDC INDICATES REVERSE

PUNCH IN = $\overline{\text{REC}} + \overline{\text{PLAY}}$

PUNCH OUT = $\overline{\text{PLAY}}$

THIS DRAWING IS BASED ON THE LATEST INFORMATION AVAILABLE TO ADAMS-SMITH AND IS BELIEVED TO BE CORRECT. HOWEVER, IT IS THE RESPONSIBILITY OF THE USER TO DETERMINE WHETHER ITS USE IS APPROPRIATE IN ANY SPECIFIC INSTALLATION.

ADAMS-SMITH		
Dwn	ZETA-THREE	Date
DKM		
STUDER A-807/812/820, C270/274/278		
INTERFACE DRAWING		
Appy		Rev
<i>AKL</i>	055	-2

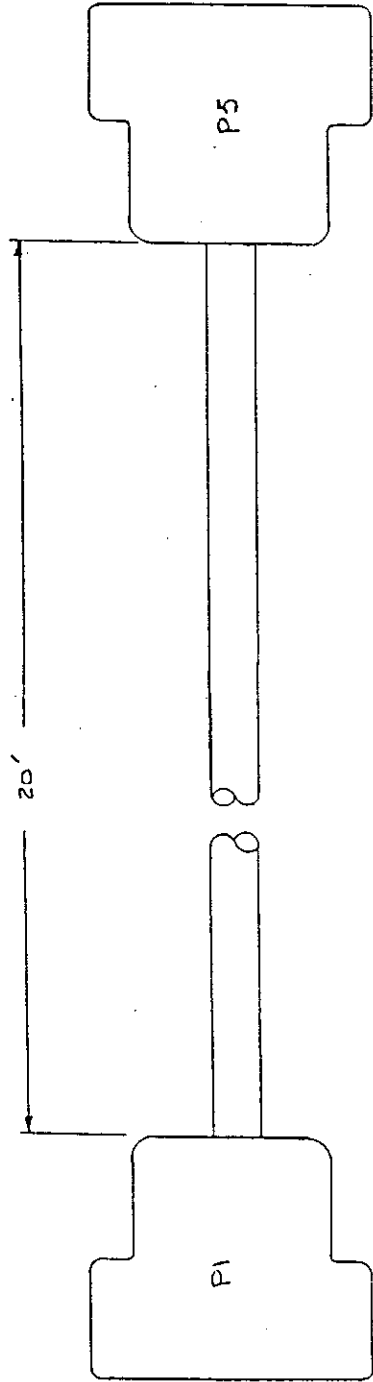


ITEM	DESCRIPTION	QTY	MFRG	PART NO
P5	SHIELDED CABLE PAIR WITH LOCKING SCREWS	1	MOGAMI	NEGLEX 2714
P5	PLUG	1	JAE	DB-C4-J11
P1	SHIELDED CABLE PAIR WITH LOCKING SCREWS	1	JAE	DB-25-P
P1	PLUG	1	JAE	DB-C4-J11-S1
			JAE	DB-25P
			MFRG	

BILL OF MATERIAL

ADAMS·SMITH

DATE	2-14-89
REV	3-21-89

DOWN SIGHT INTERFACE
 CABLE NO C55 STUDER C-270/274/278
 A-807/812/820

APPROVED

 B8909-0008 REV - 2